

## Data sheet

256-402/333-000

TERMINAL STRIP WITH FINGER OPERATED LEVERS 2 SOLDER PINS / POLE  
PIN SPACING 5/5.08 MM / 0.2 IN FRONT-ENTRY CAGE CLAMP CONNECTION



## Technical data

Package size 420 pieces.

Pin spacing from	5 mm
Pin spacing up to	5.08 mm
Pin spacing from	0.197 in
Pin spacing up to	0.2 in
pole count	2
Cross section from [mm <sup>2</sup> ]	0.08 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	2.5 mm <sup>2</sup>
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Measured voltage EN	250 V
Measured shock voltage	4 kV
Pollution degree	3
Current intensity EN	16 A
Measured voltage EN	500 V
Measured shock voltage	4 kV
Pollution degree	2
Current intensity EN	16 A
Weight	2.1 g
Color	grey
Wiring type	Front-entry
No. of connection Points	2
No. of potentials	2
Height	22.3 mm

---

## Data sheet

256-402/333-000

**TERMINAL STRIP WITH FINGER OPERATED LEVERS 2 SOLDER PINS / POLE  
PIN SPACING 5/5.08 MM / 0.2 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

---

Height	0.878 in
Width	5 mm
Width	0.197 in
Depth	19.6 mm
Depth	0.772 in
Strip length from	5 mm
Strip length to	6 mm
Strip length	0.22 in

xxx-xxx/000-005	red
xxx-xxx/333-006	blue
xxx-xxx/333-008	dark gray
xxx-xxx/333-009	light gray
xxx-xxx/333-012	orange
xxx-xxx/333-017	light green

---

**Data sheet**

256-402/333-000

**TERMINAL STRIP WITH FINGER OPERATED LEVERS 2 SOLDER PINS / POLE  
PIN SPACING 5/5.08 MM / 0.2 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

---

Approval	Voltage	Current	Approval number	Notes
BBJ	250	16	B/12/697/03	
CCA	250	16	DK2082	
CSM	250/500	16	017956	
DEMKO	250	16	98-04355	
GL	500/250	16	17296-00HH	
RMR	250	16	99.00007.250	
RosTesT	250/500	16	B09523	

## Data sheet

256-402/333-000

**TERMINAL STRIP WITH FINGER OPERATED LEVERS 2 SOLDER PINS / POLE  
PIN SPACING 5/5.08 MM / 0.2 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

## Accessories


## Item number

Jumper GDS RM 5mm	Jumper PCB Spacing 5mm
Jumper GDS RM 7,5mm	Jumper PCB Spacing 7.5mm
Profile PCB 236, 255, 256	Profile PCB 236, 255, 256
Profile PCB 257, 736, 737, 738	Profile PCB 257, 736, 737, 738
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-257
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-258
SCREWDRIVER Type 2, bar (3,5 x 0,5) mm	210-120
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-161
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-162
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-163
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-164
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5 MM	249-160/237-106
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5.08 MM	249-166
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5.08 MM	249-167
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5.08 MM	249-168
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5.08 MM	249-169
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 5.08 MM	249-165/237-126
TEST PLUG SUITABLE FOR PCB TERMINAL BLOCKS, SERIES 255, 256, 257	249-110
TEST PLUG SUITABLE FOR PCB TERMINAL BLOCKS, SERIES 255, 256, 257	249-111

## Data sheet

256-402/333-000

**TERMINAL STRIP WITH FINGER OPERATED LEVERS 2 SOLDER PINS / POLE  
PIN SPACING 5/5.08 MM / 0.2 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

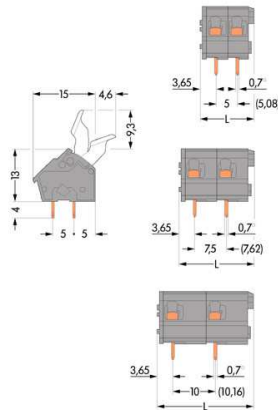

---

Data sheet

256-402/333-000

**TERMINAL STRIP WITH FINGER OPERATED LEVERS 2 SOLDER PINS / POLE  
PIN SPACING 5/5.08 MM / 0.2 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

---

Diameter of drilled hole:  $1,1^{+0,1}$  mm

$L = (\text{No. of poles} \times \text{pin spacing}) + 2,9$  mm