


SPECIFICATIONS


(Typical values for batteries stored at 20°C for one year)

Nominal Capacity(At 5mA/20°C/68°F/2.0V Cut-Off)	16.5 Ah
Open Circuit Voltage(At 20°C/68°F)	3.67 V
Nominal Voltage(At 5mA/20°C/68°F)	3.6 V
Maximum Continuous Current	230 mA
Maximum Pulse Current Capability	500 mA
Rated 1 Sec. Pulse Capability(To 3V)	100 mA
Operating Temperature Range	-55 ~ 85 °C
Weight	92.5 g(3.26 oz)
Anode Surface Area	40 cm ²
Volume	51 cm ³
Diameter(Max)	33.6 mm
Height(Max)	60 mm

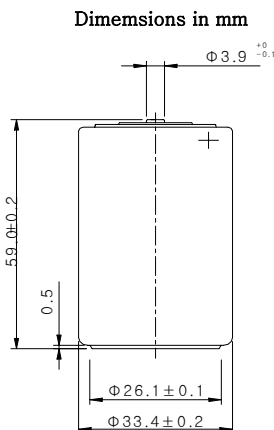


WARNING


Fire, Explosion And Severe Burn Hazard
Do Not Recharge, Crush, Disassemble,
Heat Above 212°F(100°C), Incinerate
Or Expose Contents To Water

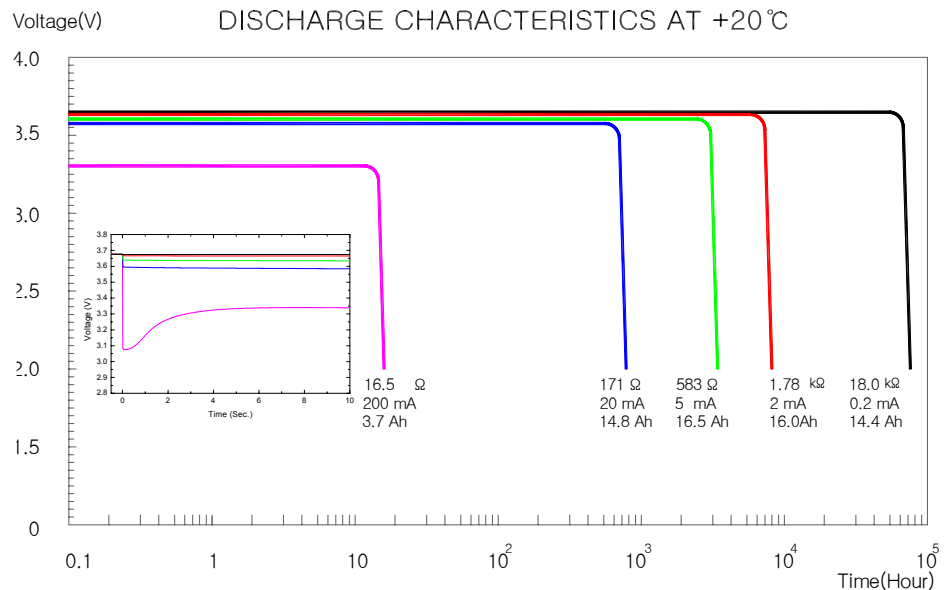


CAPACITY vs. CURRENT

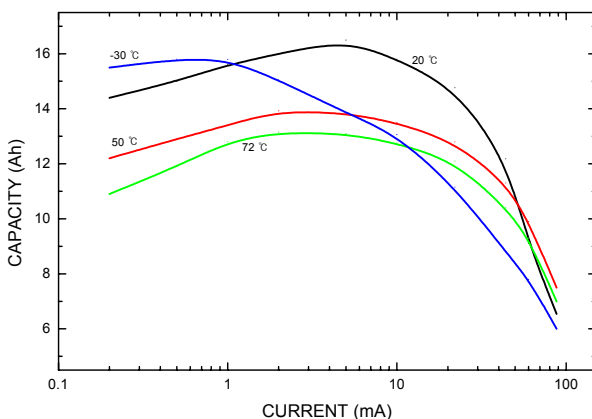


TEMPERATURE vs. OPERATING VOLTAGE

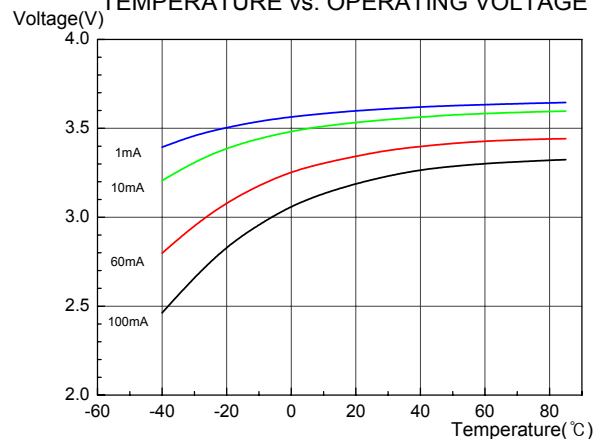

1. STD Terminal

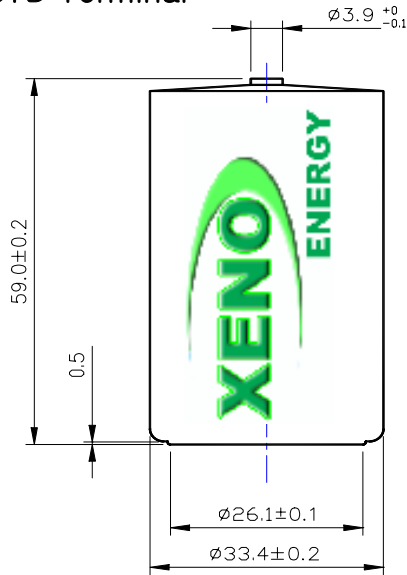

2. Connector

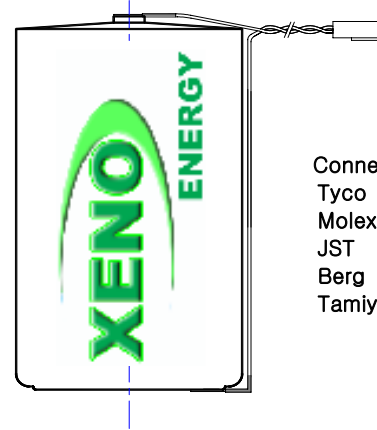

Connector Type :
Tyco
Molex
JST
Berg
Tamiya

3. AX Terminal



4. T1 Terminal

