

Data sheet

232-172

**FEMALE PLUG WITH STRAIGHT SOLDER PIN
PIN SPACING 5.08 MM / 0.2 IN SOLDER PIN 0.6x1 MM WITH CODIG FINGERS**



Technical data

Package size 25 pieces.

Pin spacing from	5.08 mm
Pin spacing from	0.2 in
pole count	12
Voltage UL	300 V
Voltage CSA	300 V
Current UL	15 A
Current CSA	15 A
Measured voltage EN	250 V
Measured shock voltage	4 kV
Pollution degree	3
Current intensity EN	12 A
Weight	10.9 g
Color	orange
No. of connection Points	12
No. of potentials	12
Height	18.25 mm
Height	0.719 in
Width	62.46 mm
Width	2.459 in
Depth	11.6 mm
Depth	0.457 in

Data sheet

232-172

**FEMALE PLUG WITH STRAIGHT SOLDER PIN
PIN SPACING 5.08 MM / 0.2 IN SOLDER PIN 0.6x1 MM WITH CODIG FINGERS**

xxx-xxx/031-000

with fixing flange

xxx-xxx/039-000

with locking devices

xxx-xxx/047-000

with spacers

Data sheet

232-172

FEMALE PLUG WITH STRAIGHT SOLDER PIN PIN SPACING 5.08 MM / 0.2 IN SOLDER PIN 0.6x1 MM WITH CODIG FINGERS

Approval	Voltage	Current	Approval number	Notes
BBJ	250	12	B/12/699/03	
BV	400	16	11915/A0	
CCA	250	12	DK2127	
CSA	300	15	154112-1465035	
CSA	300	15	18677-30	
DEMKO	250		88126	
GL	250	12	17296-00HH	
KEMA	250	12	98.2486.01	
KR	250/400	12/16	HMB05880-EL003	
LR	250	12	96/20035	
NEMKO	250		P94101840	
RMR	250	12	99.00007.250	
RosTesT	250	12	B09523	
UL	300	15	E45172	

Data sheet

232-172

**FEMALE PLUG WITH STRAIGHT SOLDER PIN
PIN SPACING 5.08 MM / 0.2 IN SOLDER PIN 0.6x1 MM WITH CODIG FINGERS**


Accessories**Item number**

SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-257
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-258
SCREWDRIVER Type 2, bar (3,5 x 0,5) mm	210-120
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620
TEST PLUG 2 MM / 0.079 IN WIDE	210-136
TEST PLUG 2.3 MM / 0.091 IN WIDE	210-137

Data sheet

232-172

FEMALE PLUG WITH STRAIGHT SOLDER PIN
PIN SPACING 5.08 MM / 0.2 IN SOLDER PIN 0.6x1 MM WITH CODIG FINGERS

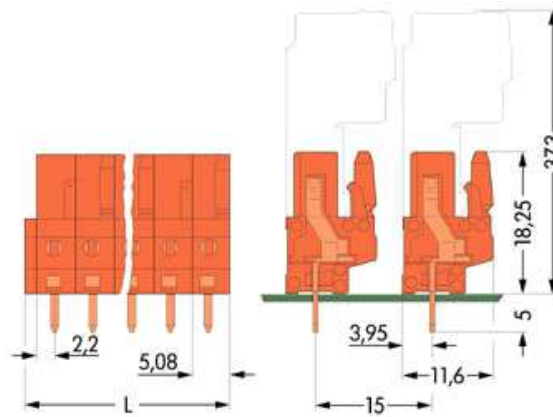

Data sheet

232-172

**FEMALE PLUG WITH STRAIGHT SOLDER PIN
PIN SPACING 5.08 MM / 0.2 IN SOLDER PIN 0.6x1 MM WITH CODIG FINGERS**

Diameter of drilled hole: $1,3^{+0,1}$ mm

$L = (\text{No.of poles} \times \text{pin spacing}) + 1,5$ mm