

IEC plug connector E, rewirable, straight



4732/4735



Description

- Rewireable plug:
- Screw-on
- Inlet, Pin temperature 70 °C, Protection class I
- Cable
- Substitute for type

Weblinks

Approvals: www.schurter.com/approvals
 RoHS: <http://www.schurter.com/rohs>
 CHINA-RoHS: www.schurter.com/china-rohs
 Webstore: www.schurterinc.com/estore/search.ihtml


Technical Data

Ratings IEC	10A / 250VAC; Hz 50	Appliance-Inlet /-Outlet	E acc. to IEC/EN 60320-2-2, UL 498, CSA C22.2 no. 42 (for cold condition) pin-temperature 70 °C, 10A, Protection class I
Ratings UL/CSA	15A / 250VAC; 60Hz		
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50Hz)		
Allowable Operation Temp.	-25 °C to 70 °C		
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140		
Terminal	Cable		
Material: Housing	Thermoplastic, black, UL 94V-0		

Dimensions

4735

Length |—————| 28.7 mm

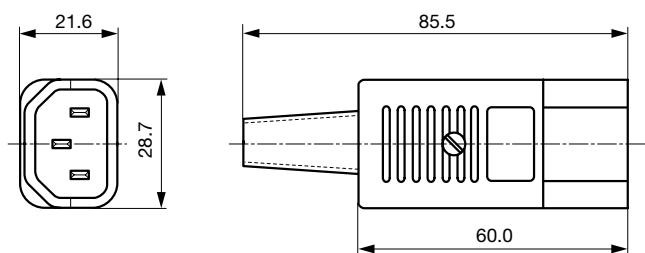

Variants

[Webstore](#)

Color	Max. cable diameter	Max. wire size	Order Number
black	10.0 mm	3 x 2 mm ² / 3 x 14 AWG	4735.0000

Max. torque for screws: Terminal: 0.5 Nm, Cable clamp: 0.3 Nm, Cover: 0.3 Nm

Cord retaining clamp see accessories

Packaging unit 100 Pcs

Accessory**Description**

[Cord retaining kits](#)
Cord retaining strain relieve
