


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2020/06/17
2	CORRECTED	TIM	2020/07/06

**NOTES:**

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance

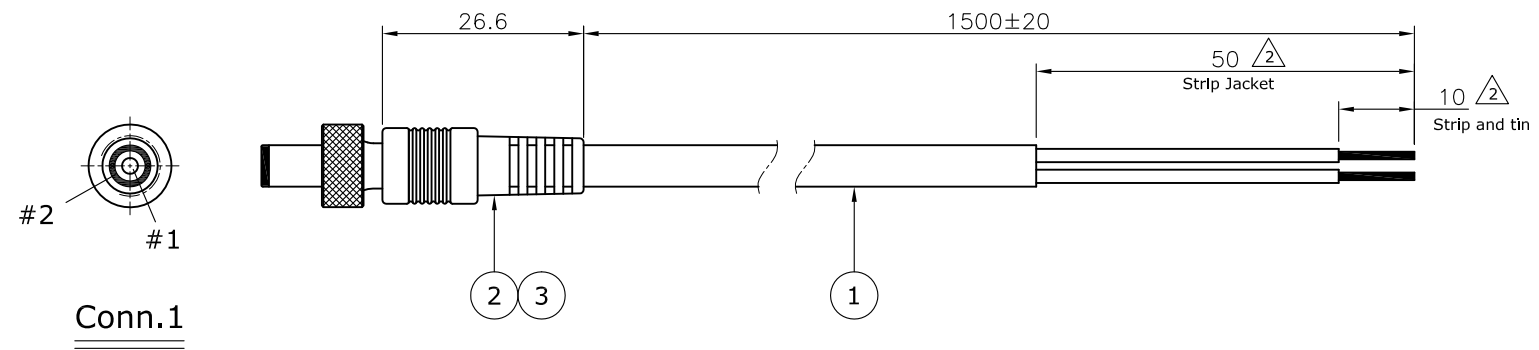

PIN ASSIGNMENT <sup>△</sup>

Conn.1

- 1 Red Positive Electrode (+)
- 2 Black Negative Electrode (-)

3	xg	Molding, Black
2	1PC	Conn., DC 5.5*2.5 Plug
1	1PC	Cable, UL2464 20AWG*2C, 80°C 300V, Black
NO. Q'ty		DESCRIPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		
UNIT:	1~10 ±1 11~30 ±2 31~50 ±3 51~200 ±5	>401 ±10 ANGLE ±5°
mm		
		www.attend.com.tw
DRAWN	Tim	2020/06/17
CHECKED	Anson	2020/06/17
APPROVED	Jennifer	2020/06/17
		DRAWN NAME: DC Power Cable, L=1500
		CUSTOMER NO.
SCALE	SHEET	SIZE
1/1	1/1	A4
		PRODUCT NO. DC-1P00-2025008

