
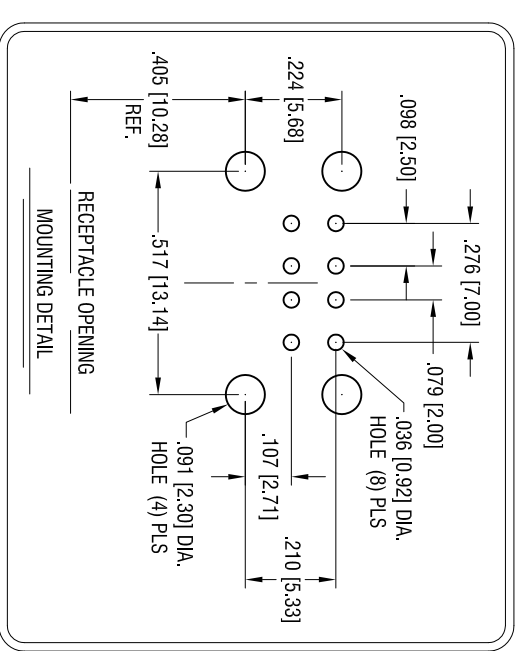
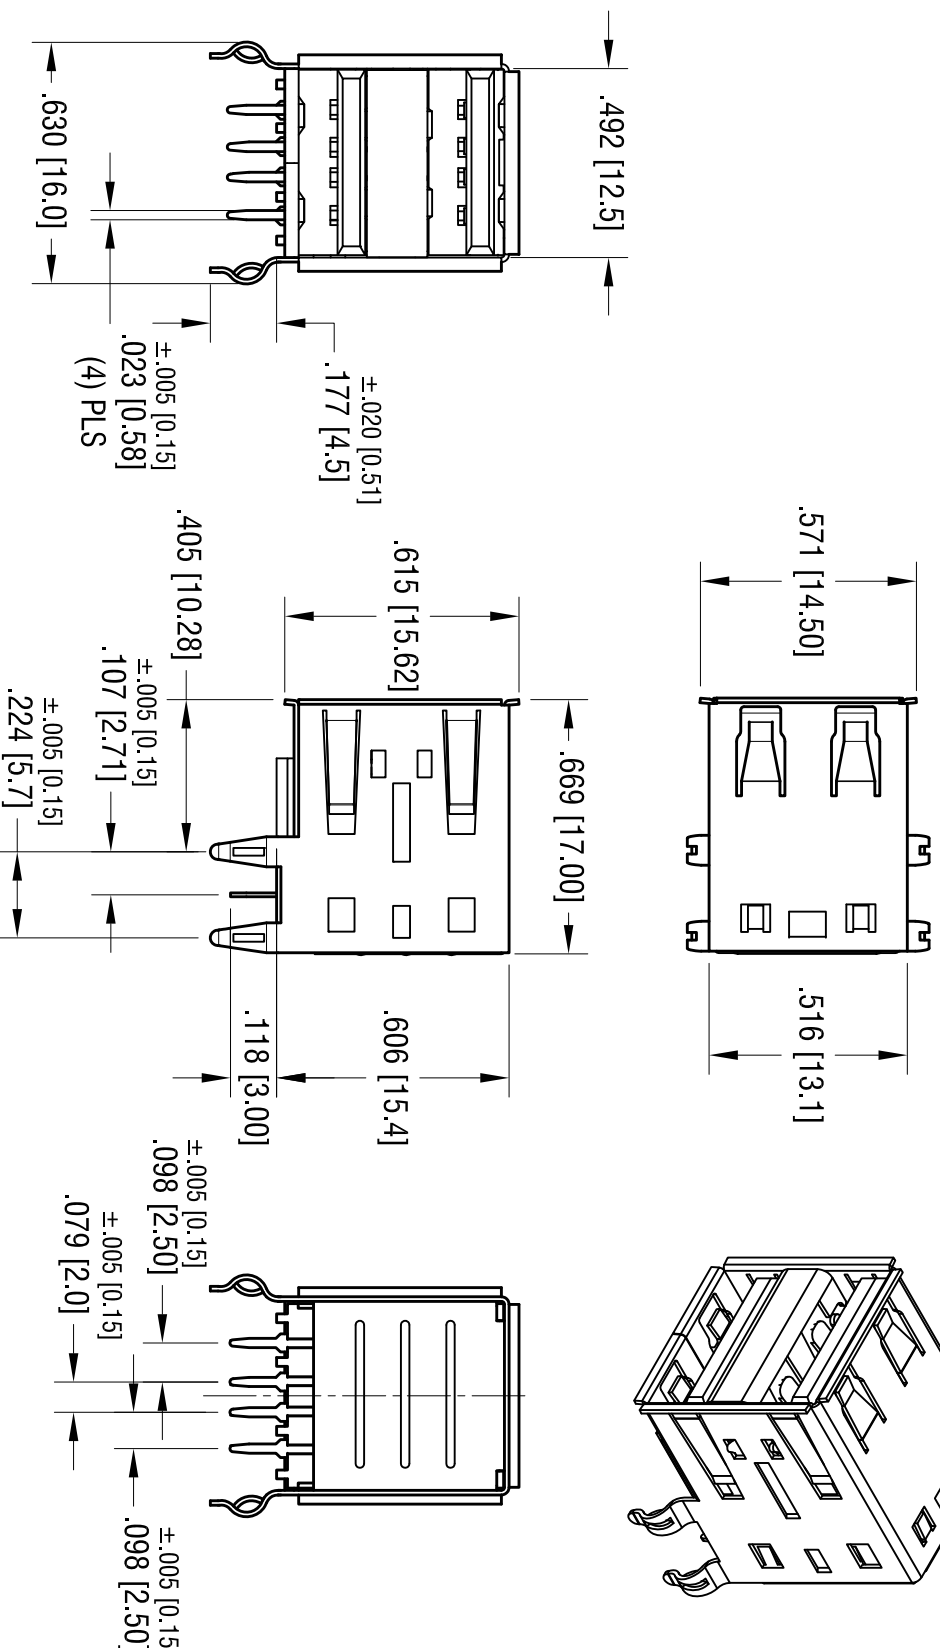


DATE	DESCRIPTION	REV.
8.13.99	CHANGE AS PER ECN 99-057	A
8.08.05	CHANGE AS PER ECN 05-032	B
7.16.08	CHANGE AS PER ECN08-129	C
12.16.09	CHANGE AS PER ECN 09-188	D

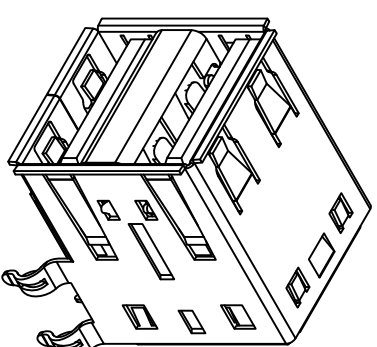

Notes:

- Shell: Mat'l: Phosphor Bronze,
- Finish: Tin Plate over Nickel Plate.
- Insulator: Mat'l- Glass Filled LCP
- Contacts: Mat'l: Phosphor Bronze
- Finish: Contact Area -Gold Plate over Nickel Plate
- Solder Tail - Tin Plate over Nickel Plate

- Electrical Specifications
- Rated Voltage: 30V AC (rms)
- Contact Current Rating: 1A Max.
- Contact Resistance: 30 milliohms Max.
- Dielectric Withstanding: 750V AC
- Operating Temperature: -55°C to 85°C

KEYSTONE ELECTRONICS CORP.

www.keystone.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900

PART NAME

USB A-TYPE DUAL-HORIZONTAL SOCKET

MATERIAL

AS NOTED

FINISH

AS NOTED

TOLERANCES	INCH	[MM]	CODE	DWG NO.
DECIMAL	± .010	[± 0.25]	C/M	922
ANGULAR	± 1°			

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

DRN BY: NT DATE: 6.18.98

APPD: LN SCALE: 2X