Feedthrough PCB Terminal Strips 2.5 mm²/AWG 14
Pin Spacing 5.08 mm / 0.2 in; Series 231, 731

Right angle pin 1 x 1.2 mm / 0.039 x 0.047 in Pin spacing 5.08 mm / 0.2 in	Right angle pin 1 x 1.2 mm / 0.039 x 0.047 in Pin spacing 5.08 mm / 0.2 in	Long wire-wrap pin 1 x 1 mm / 0.039 x 0.039 in Pin spacing 5.08 mm / 0.2 in
0.08 – 2.5 mm² | AWG 28 – 14	0.08 – 2.5 mm² | AWG 28 – 14	0.08 – 2.5 mm² | AWG 28 – 14
250 V/4 kV/3, 16 A | 300 V, 15 A ❶	250 V/4 kV/3, 16 A | 300 V, 15 A ❶	250 V/4 kV/3, 5 A | 300 V, 5 A ❶
500 V/4 kV/2, 16 A | 300 V, 15 A	500 V/4 kV/2, 16 A | 300 V, 15 A	500 V/4 kV/2, 5 A | 300 V, 5 A
8 – 9 mm / 0.33 in	8 – 9 mm / 0.33 in	8 – 9 mm / 0.33 in
* CNET GL BV LR ABS	* CCA GL BV LR ABS	*

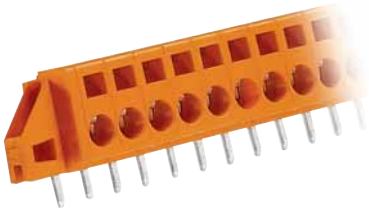

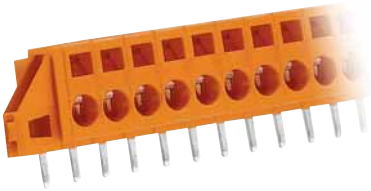

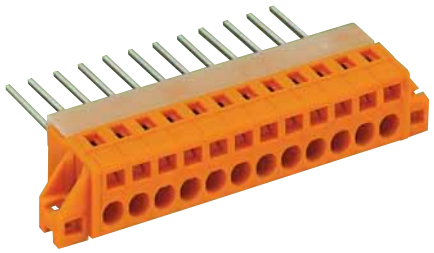

No. of poles	Item No.	Pack.-unit pcs
Single-conductor feedthrough terminal strips with fixing flanges for flush-mounting, orange		
2	**231-632/017-000**	100
3	**231-633/017-000**	50
4	**231-634/017-000**	50
5	**231-635/017-000**	50
6	**231-636/017-000**	50
7	**231-637/017-000**	50
8	**231-638/017-000**	50
9	**231-639/017-000**	25
10	**231-640/017-000**	25
11	**231-641/017-000**	25
12	**231-642/017-000**	25

No. of poles	Item No.	Pack.-unit pcs
Single-conductor feedthrough terminal strips with fixing flanges for feedthrough applications, orange		
2	**231-632/023-000**	100
3	**231-633/023-000**	50
4	**231-634/023-000**	50
5	**231-635/023-000**	50
6	**231-636/023-000**	50
7	**231-637/023-000**	50
8	**231-638/023-000**	50
9	**231-639/023-000**	25
10	**231-640/023-000**	25
11	**231-641/023-000**	25
12	**231-642/023-000**	25

No. of poles	Item No.	Pack.-unit pcs
Single-conductor feedthrough terminal strips with fixing flanges for feedthrough applications, orange		
2	**731-162**	50
3	**731-163**	50
4	**731-164**	25
5	**731-165**	25
6 ❷	**731-166/048-000**	25
7	**731-167/048-000**	25
8	**731-168/048-000**	25
9	**731-169/048-000**	10
10	**731-170/048-000**	10
11	**731-171/048-000**	10
12	**731-172/048-000**	10

❷ from 6 poles on with reinforcing profile

Accessories (for marking accessories please see section 11)

Tapping screw, B 2.2 x 9.5
fixing hole Ø 1.8 mm
209-147 200 (2 x 100)

Tapping screw, B 2.2 x 9.5
fixing hole Ø 1.8 mm
209-147 200 (2 x 100)

Screw M 2 x 12 with nut,
for fixing element
231-195 200 (2 x 100)

Dimensions (in mm) **L = (No. of poles x pin spacing) + 3 mm** **L_1 = L + 5.8 mm** **L_2 = L_1 + 6.4 mm**

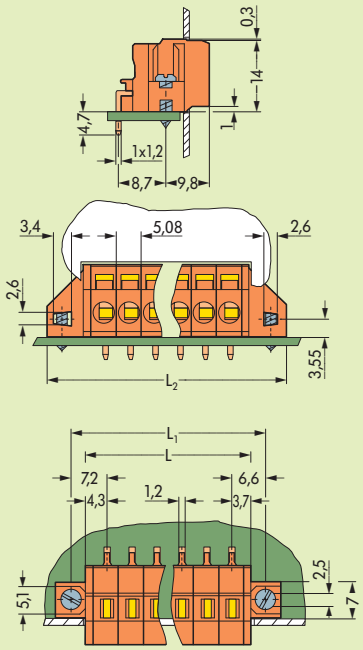

Diameter of drilled hole: $1.8^{+0.1}$ mm

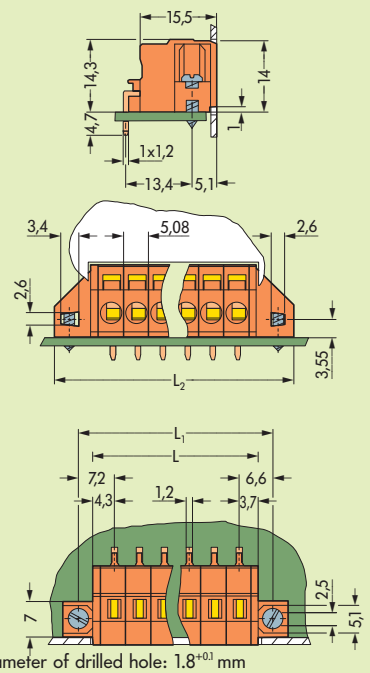

Diameter of drilled hole: $1.8^{+0.1}$ mm
for thickness of mounting plate 1.5 mm max.

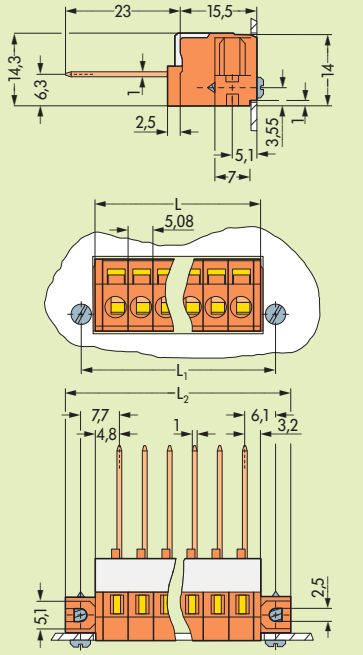

for thickness of mounting plate 1.5 mm max.

* Approvals with corresponding ratings see pages 12.3 ff.

❶ for more technical data see section 12, approvals