THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
IR	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	P	SHIELD RAW MATERIAL CHANGED TO BRASS	07OCT2011	PS	RRP

NOTES:

1. TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.15.
2. FOR APPLICATION INFORMATION SEE SPEC. 114–19019.
3. FOR PERFORMANCE REQUIREMENTS SEE SPEC. 108–19064
4. THIS DIMENSION CONCERNING THE GROUNDING TIPS OF THE SHIELD IS NOT GUARANTEED PRIOR TO MOUNTING ON THE PCB

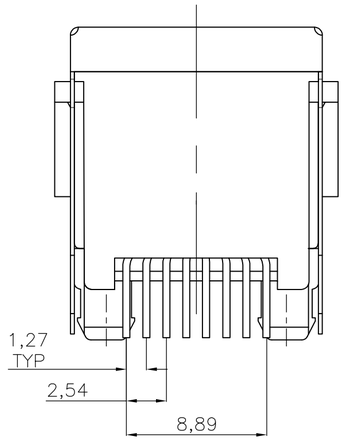



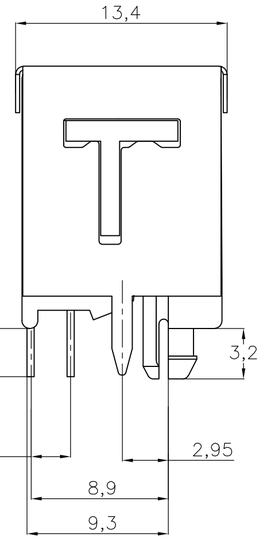

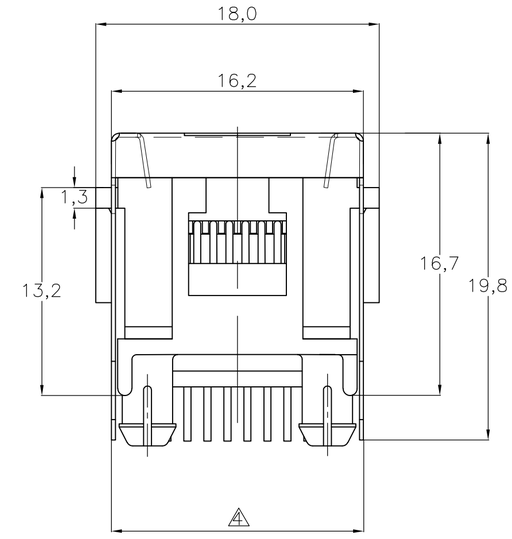



THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: SEE TABLE
FINISH: SEE TABLE

DWN	R.HOGEVEEN	03DEC91
CHK	W.BRUMMANS	30MAR92
APVD	L.v.SOEST	01APR92
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	—	

TE Connectivity

NAME: MODULAR JACK 8 POS. TOP ENTERY SHIELDED WITH PANEL STOP

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-100616	—

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 2 | REV P

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
IR	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	–SEE SHEET 1–	–	—	—

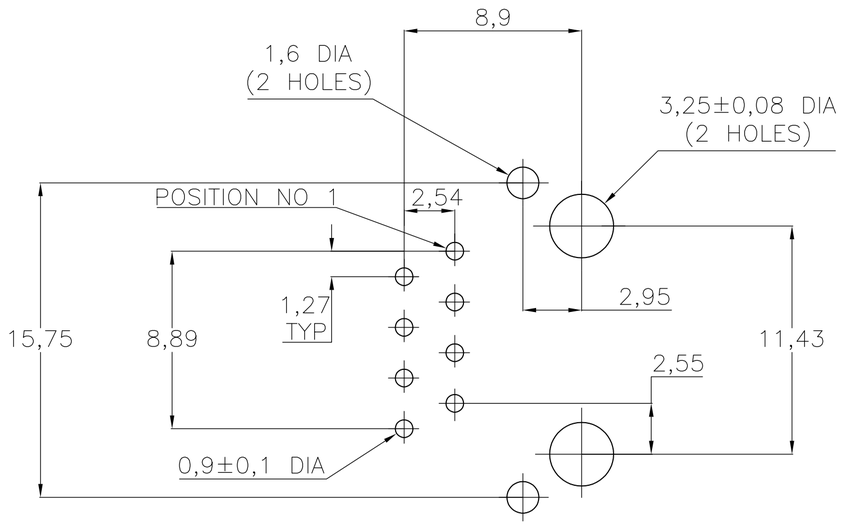

PRINTED CIRCUIT BOARD LAYOUT
[VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD.]
TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.05
PRINTED CIRCUIT BOARD THICKNESS: 1,6 mm NOMINAL.

PACKAGING	REMARKS	CONTACT PLATING	MATERIAL	PART NUMBER
BLISTER (1080 pcs, IN A BOX)	8 POSITIONS/ 8 CONTACTS,	IN CONTACT AREA : 1,2µm MIN. SEL. GOLD OVER 1,2µm MIN. NICKEL SOLDER TINES : 2,0µm MIN. TIN OVER 1,2µm MIN. NICKEL	HOUSING: PBT,UL 94–VO COLOR: BLACK CONTACTS: PHOSPHOR BRONZE SHIELD: BRASS PRE–PLATED 3–6µm THICK BRIGHT TIN	100616–2
			HOUSING: PBT,UL 94–HB COLOR: BLACK CONTACTS: PHOSPHOR BRONZE SHIELD: BRASS PRE–PLATED 3–6µm THICK BRIGHT TIN	100616–1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: SEE TABLE
FINISH: SEE TABLE

DWN	03DEC91 R.HOGEVEEN
CHK	30MAR92 W.BRUMMANS
APVD	01APR92 L.v.SOEST
PRODUCT SPEC	—
APPLICATION SPEC	—
WEIGHT	—

TE Connectivity

NAME: MODULAR JACK 8 POS. TOP ENTERY SHIELDED WITH PANEL STOP

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-100616	—

CUSTOMER DRAWING | SCALE – | SHEET 2 OF 2 | REV P