




Präzisions IC-Fassungen, gedrehte Kontakte, Raster 2,54mm, Pinlänge 7,43mm Precision IC-sockets, machined contacts, pitch 2,54mm, pin length 7,43mm

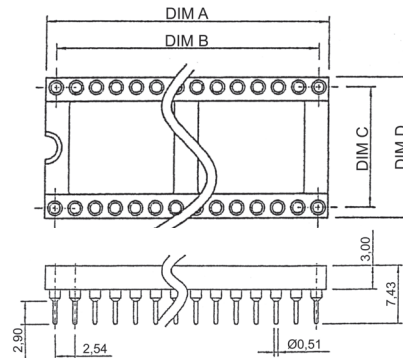

Pin Messing, gedreht	Pin Brass, machined
Clip 4 Finger Kontakt	Clip 4 finger contact
Vergütung HZL = Pin - Zinn / Clip - Gold flash HGL = Pin - Gold flash / Clip - Gold flash	Plating HZL = pin - tin / Clip - gold flash HGL = pin - gold flash / Clip - gold flash
Isolierkörper Polyamid UL94V-0	Insulator Polyamide UL94V-0
Nennstrom 3A	Current rating 3A
Kontaktwiderstand <4mΩ / Kontakt	Contact resistance <4mΩ / contact
Isolationswiderstand >1000MΩ bei 100V	Insulation resistance >1000MΩ at 100V
Betriebstemperatur HZL = -40°C bis +105°C HGL = -55°C bis +125°C	Operating temperature HZL = -40°C to +105°C HGL = -55°C to +125°C

No. of Contacts	Qty per tube	Dimension			
		A	B	C	D
06	80	7,62	5,08	7,62	10,16
08	58	10,16	7,62	7,62	10,16
10	45	12,70	10,16	7,62	10,16
14	33	17,78	15,24	7,62	10,16
16	29	20,32	17,78	7,62	10,16
18	26	22,86	20,32	7,62	10,16
20	23	25,40	22,86	7,62	10,16
24	19	30,48	27,94	15,24	17,78
24*	19	30,48	27,94	7,62	10,16
28	16	35,56	33,02	15,24	17,78
28*	16	35,56	33,02	7,62	10,16
32	14	40,64	38,10	15,24	17,78
40	11	50,80	48,26	15,24	17,78



Bestellcode: **AR - x - x - x - TT**
Ordercode :

Bitte „x“ durch die unten geeignete Option ersetzen
Please replace „x“ with appropriate option listed below

1. 2. 3.

1.	Polzahl 06, 08, 10, 14, 16, 18, 20, 24, 28, 32, 40	No. of contacts 06, 08, 10, 14, 16, 18, 20, 24, 28, 32, 40
2.	Oberfläche Lötpin HGL -Gold* HZL -Zinn* HZL/07 -Zinn/ Clip 30µ" Gold HZL/01 -Zinn/ Clip 10µ" Gold	Plating solder pin HGL -Gold* HZL -Tin* HZL/07 -Tin/ Clip 30µ" Gold HZL/01 -Tin/ Clip 10µ" Gold
3.	Ausführung - -Standard 7 -nur bei 24+28-polig (DIM C: 7.62)	Versions - -Standard 7 -only for 24+28-poles (DIM C: 7.62)

Andere Ausführungen auf Anfrage

Other versions on request

* Standard

D-Sub / Hoods Centronics
Multiflex
Modular
USB
Switches
Powercords Powersockets
MiniDIN
DIN4161x Hardmetric
Sockets + Strips Jumper