


Data sheet

281-656

4-CONDUCTOR CARRIER TERMINAL BLOCK CENTRE MARKING FRONT-ENTRY CAGE CLAMP CONNECTION HORIZONTAL TYPE

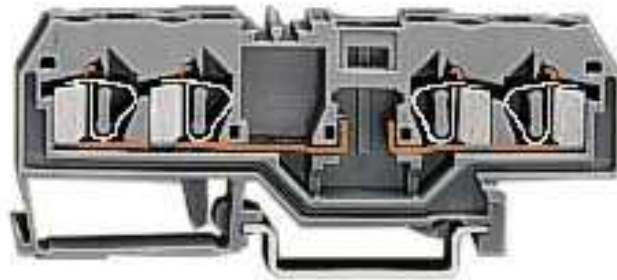

Technical data

Package size 50 pieces.

Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	4 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Voltage UL	300 V
Voltage CSA	300 V
Current UL	10 A
Current CSA	10 A
Measured voltage EN	400 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	10 A
Weight	13.015 g
Color	grey
Wiring type	Front-entry
No. of connection Points	4
No. of potentials	2
Height	29 mm
Height	1.14 in
Width	6 mm
Width	0.236 in
Depth	86 mm
Depth	3.39 in

Data sheet

281-656

**4-CONDUCTOR CARRIER TERMINAL BLOCK CENTRE MARKING
FRONT-ENTRY CAGE CLAMP CONNECTION HORIZONTAL TYPE**

Strip length from	9 mm
Strip length to	10 mm
Strip length	0.37 in

Data sheet

281-656

4-CONDUCTOR CARRIER TERMINAL BLOCK CENTRE MARKING FRONT-ENTRY CAGE CLAMP CONNECTION HORIZONTAL TYPE

Approval	Voltage	Current	Approval number	Notes
BBJ	250	6,3	B/12/700/03	
BV	250	6,3	07436/Co	
CCA	250	6,3	NL5591/1	
CSA	300	10	154112-1505034	
CSM	250	6,3	017956	
DEMKO	400		113344	
Dep.MaE	600	25	CS4866N	
DNV	800	32	E6999	
KEMA	400	10	2076376.01	
KR	500/800	10-35	HMB05880-EL001	
LR	250	6,3	91/20112(E1)	
NEMKO	400		L92062	
PRS	250	6,3	TE/1219/880590/98	
RMR	250	6,3	99.00007.250	
RosTesT	250	6,3	B09523	
UL	300	10	E45172	

Data sheet

281-656

4-CONDUCTOR CARRIER TERMINAL BLOCK CENTRE MARKING FRONT-ENTRY CAGE CLAMP CONNECTION HORIZONTAL TYPE

Accessories	Item number
ALTERNATE COMB TYPE JUMPER BAR INSULATED	281-492
ALUMINIUM CARRIER RAIL 35 X 7.5 MM, 1.5 MM / 0.059 IN THICK	210-196
COMB TYPE JUMPER BAR INSULATED	281-482
COMB TYPE JUMPER BAR INSULATED	281-483
COMB TYPE JUMPER BAR INSULATED	281-490
COPPER CARRIER RAIL 35 X 15 MM, 2.3 MM / 0.091 IN THICK	210-198
COVER CARRIER TYPE 1	709-167
COVER TYPE 1	709-153
END AND INTERMEDIATE PLATE 2.5 MM / 0.098 IN THICK	281-334
END AND INTERMEDIATE PLATE 2.5 MM / 0.098 IN THICK	281-335
FUSE PLUG WITH PULL-TAB 6 MM / 0.236 IN WIDE	281-511
FUSE PLUG WITH PULL-TAB 6 MM / 0.236 IN WIDE	281-512
FUSE PLUG WITH PULL-TAB 6 MM / 0.236 IN WIDE	281-512/281-417
FUSE PLUG WITH PULL-TAB 6 MM / 0.236 IN WIDE	281-512/281-501
FUSE PLUG WITH PULL-TAB 6 MM / 0.236 IN WIDE	281-512/281-418
GROUP MARKER CARRIER FOR UP TO 1 WMB-MARKER OR 2 MARKER TAGS	209-142
GROUP MARKER CARRIER FOR UP TO 2 WMB-MARKER OR 5 MARKER TAGS	209-141
GROUP MARKER CARRIER FOR UP TO 3 WMB-MARKER OR 8 MARKER TAGS	209-140
HOLD BLOCK FOR ISOLATED MOUNTING ON DIN 35 RAIL	209-106
Individual wire jumpers	individual jumper
INSULATION STOP 0.08 - 0.2 MM ²	281-470
INSULATION STOP 0.25 - 0.5 MM ²	281-471
INSULATION STOP 0.25 - 1.5 MM ²	281-472
Open individual wire jumpers ends	individual jumper open end
OPERATING STICKER FOR FRONT-ENTRY RAIL-MOUNTED TERMINAL BLOCKS	210-186
OPERATING TOOL FITTED FOR SERIES 264, 280, 281	209-130
OPERATING TOOL INSULATED	280-432
OPERATING TOOL INSULATED	280-433
OPERATING TOOL INSULATED	281-440
PIVOTABLE GROUP MARKER CARRIER	249-105
PUSH-IN TYPE WIRE JUMPERS L = 180 MM/7.087 IN	249-123
PUSH-IN TYPE WIRE JUMPERS WIRE LENGTH 110 MM / 4.331 IN	249-126
PUSH-IN TYPE WIRE JUMPERS WIRE LENGTH 250 MM / 9.843 IN	249-127
PUSH-IN TYPE WIRE JUMPERS WIRE LENGTH 60 MM / 2.362 IN	249-125
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019 IN	210-257
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019 IN	210-258
SCREWDRIVER Type 2, bar (3,5 x 0,5) mm	210-120
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620

Data sheet

281-656

4-CONDUCTOR CARRIER TERMINAL BLOCK CENTRE MARKING FRONT-ENTRY CAGE CLAMP CONNECTION HORIZONTAL TYPE

SCREWLESS END STOP 10 MM / 0.394 IN WIDE	249-117
SCREWLESS END STOP 6 MM / 0.236 IN WIDE	249-116
SHORTING LINK 5 X 20 MM / 0.197 X 0.78 IN	281-503
SPARE FIXING / RETAINING SCREWS	209-196
SPARE KNURLED NUT	210-549
STEEL CARRIER RAIL 35 X 15 MM, 1.5 MM / 0.059 IN THICK	210-114
STEEL CARRIER RAIL 35 X 15 MM, 1.5 MM / 0.059 IN THICK	210-197
STEEL CARRIER RAIL 35 X 15 MM, 1.5 MM / 0.059 IN THICK	210-506
STEEL CARRIER RAIL 35 X 15 MM, 1.5 MM / 0.059 IN THICK	210-508
STEEL CARRIER RAIL 35 X 15 MM, 2.3 MM / 0.091 IN THICK	210-118
STEEL CARRIER RAIL 35 X 15 MM, 2.3 MM / 0.091 IN THICK	210-548
STEEL CARRIER RAIL 35 X 7.5 MM, 1 MM / 0.039 IN THICK	210-112
STEEL CARRIER RAIL 35 X 7.5 MM, 1 MM / 0.039 IN THICK	210-113
STEEL CARRIER RAIL 35 X 7.5 MM, 1 MM / 0.039 IN THICK	210-162
STEEL CARRIER RAIL 35 X 7.5 MM, 1 MM / 0.039 IN THICK	210-229
STEEL CARRIER RAIL 35 X 7.5 MM, 1 MM / 0.039 IN THICK	210-504
STEEL CARRIER RAIL 35 X 7.5 MM, 1 MM / 0.039 IN THICK	210-505
SYRINGE CONTENT: 20 ml ALU-PLUS CONTACT PASTE	249-130
WIRE COMMONING CHAIN INSULATED	210-103
WIRE COMMONING CHAIN INSULATED	210-123
WIRE COMMONING CHAIN INSULATED	709-110
WIRE COMMONING CHAIN INSULATED	709-111
WIRE COMMONING CHAIN INSULATED	709-112
WMB MULTI MARKING SYSTEM PLAIN	793-501
WMB MULTI MARKING SYSTEM PLAIN	793-5501
WMB MULTI MARKING SYSTEM PLAIN	793-501/000-006
WMB MULTI MARKING SYSTEM PLAIN	793-501/000-005
WMB MULTI MARKING SYSTEM PLAIN	793-501/000-002
WMB MULTI MARKING SYSTEM PLAIN	793-501/000-007
WMB MULTI MARKING SYSTEM PLAIN	793-501/000-012
WMB MULTI MARKING SYSTEM PLAIN	793-501/000-017
WMB MULTI MARKING SYSTEM PLAIN	793-501/000-023
WMB MULTI MARKING SYSTEM PLAIN	793-501/000-024
WSB QUICK MARKING SYSTEM PLAIN	209-501
WSB QUICK MARKING SYSTEM PLAIN	209-501/000-002
WSB QUICK MARKING SYSTEM PLAIN	209-501/000-005
WSB QUICK MARKING SYSTEM PLAIN	209-501/000-006
WSB QUICK MARKING SYSTEM PLAIN	209-501/000-007
WSB QUICK MARKING SYSTEM PLAIN	209-501/000-012
WSB QUICK MARKING SYSTEM PLAIN	209-501/000-017
WSB QUICK MARKING SYSTEM PLAIN	209-501/000-023

Data sheet

281-656

**4-CONDUCTOR CARRIER TERMINAL BLOCK CENTRE MARKING
FRONT-ENTRY CAGE CLAMP CONNECTION HORIZONTAL TYPE**

WSB QUICK MARKING SYSTEM PLAIN

209-501/000-024