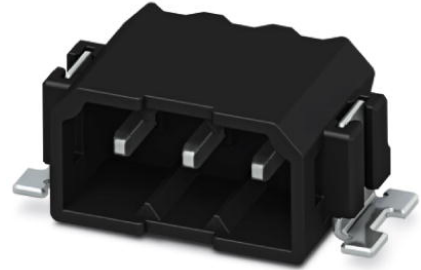



PTSM 0,5/ 4-HH-2,5-SMD R32

Order No.: 1778780

<http://eshop.phoenixcontact.co.uk/phoenix/treeViewClick.do?UID=1778780>

Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 4, Pitch: 2.5 mm, Color: Black, Contact surface: Tin, Assembly: SMD/THT/THR

Commercial data	
EAN	 4 046356 529990
Pack	600
Customs tariff	85369010
Country of Origin	DE
Catalog page information	Page 57 (CC-2011)

Product notes

WEEE/RoHS-compliant since:
17/09/2009



Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
Dimensions / positions	
Length	7.5 mm
Pitch	2.5 mm
Dimension a	7.5 mm
Number of positions	4
Pin spacing	2.50 mm

Technical data


Range of articles	PTSM 0,5/...-HH-SMD
Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/2)	160 V
Rated voltage (II/2)	160 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	6 A
Nominal voltage U_N	50 V
Maximum load current	6 A
Insulating material	LCP
Inflammability class according to UL 94	V0
Color	Black
Nominal voltage, UL/CUL Use Group B	150 V
Nominal current, UL/CUL Use Group B	6 A

Certificates


Certification CUL, GOST, UL

Drawings

Drilling plan/solder pad geometry

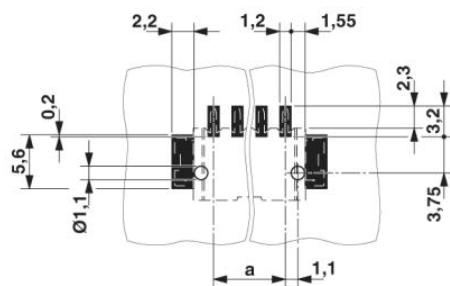

Dimensioned drawing

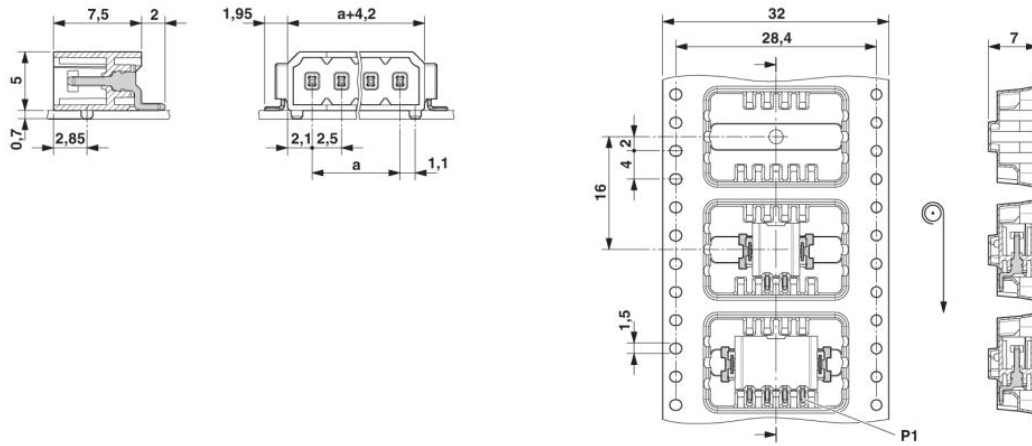

Connection data incl. use groups





Address

PHOENIX CONTACT Ltd
Halesfield 13
Telford / Shropshire / TF7 4PG,England
Phone 01952 681 700
Fax 01952 681 799
<http://www.phoenixcontact.co.uk>



Phoenix Contact Ltd.
Technical modifications reserved;