

- Compact SIP package
- Very high efficiency up to 97%
- Excellent line / load regulation
- Low standby current
- Operating temperature range  $-40$  to  $90^{\circ}\text{C}$
- Over-temperature protection
- Short circuit protection
- 3-year product warranty



TSR-0.5 is a series of step-down non-isolated switching regulators in compact SIP package. These converters are an ideal drop-in replacement to LM78 linear regulators when energy efficiency is a parameter of the design. The high efficiency up to 97% allows full load operation up to  $+80^{\circ}\text{C}$  ( $+90^{\circ}\text{C}$  with 50% load) ambient temperature without the need of forced air cooling. Excellent output voltage accuracy and low standby current are other features that distinguish switching regulators from linear regulators.

Models				
Order Code	Output Current max.	Input Voltage Range	Output Voltage nom.	Efficiency typ.
TSR 0.5-2415	500 mA	4.75 - 32 VDC (24 VDC nom.)	1.5 VDC	73 % (at $V_{in}$ min.)
TSR 0.5-2418			1.8 VDC	82 % (at $V_{in}$ min.)
TSR 0.5-2425			2.5 VDC	87 % (at $V_{in}$ min.)
TSR 0.5-2433			3.3 VDC	91 % (at $V_{in}$ min.)
TSR 0.5-2450		6.5 - 32 VDC (24 VDC nom.)	5 VDC	94 % (at $V_{in}$ min.)
TSR 0.5-2465		8 - 32 VDC (24 VDC nom.)	6.5 VDC	95 % (at $V_{in}$ min.)
TSR 0.5-2490		11 - 32 VDC (24 VDC nom.)	9 VDC	96 % (at $V_{in}$ min.)
TSR 0.5-24120		15 - 32 VDC (24 VDC nom.)	12 VDC	97 % (at $V_{in}$ min.)
TSR 0.5-24150		18 - 32 VDC (24 VDC nom.)	15 VDC	97 % (at $V_{in}$ min.)

Note - For input voltage higher 28 VDC an input capacitor of 22  $\mu\text{F}$  is required

### Input Specifications

Input Current	- At no load	5 mA typ.
Surge Voltage		34 VDC max. (1 s max.)
Recommended Input Fuse		(The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Capacitor
Short Circuit Input Power		1.5 W max.

### Output Specifications

Voltage Set Accuracy		±3% max.
Regulation	- Input Variation (Vmin - Vmax)	0.2% max. (9, 12 & 15 Vout models) 0.4% max. (other models)
	- Load Variation (10 - 100%)	0.4% max. (9, 12 & 15 Vout models) 0.6% max. (other models)
Ripple and Noise (20 MHz Bandwidth)		1.5 Vout models: 30 mVp-p max. 1.8 Vout models: 30 mVp-p max. 2.5 Vout models: 30 mVp-p max. 3.3 Vout models: 30 mVp-p max. 5 Vout models: 30 mVp-p max. 6.5 Vout models: 30 mVp-p max. 9 Vout models: 40 mVp-p max. 12 Vout models: 40 mVp-p max. 15 Vout models: 40 mVp-p max.
Capacitive Load		220 µF max.
Minimum Load		Not required
Temperature Coefficient		±0.015 %/K max.
Short Circuit Protection		Continuous, Automatic recovery
Transient Response	- Response Deviation	2% max. (50% Load Step)
	- Response Time	100 µs max. (50% Load Step)

### EMC Specifications

EMI Emissions	- Conducted Emissions	EN 55032 class B (with external filter) FCC Part 15 class B (with external filter)
	- Radiated Emissions	EN 55032 class B (internal filter) FCC Part 15 class B (internal filter)
		External filter proposal: <a href="http://www.tracopower.com/overview/tsr0-5">www.tracopower.com/overview/tsr0-5</a>
EMS Immunity	- Electrostatic Discharge	Air: EN 61000-4-2, ±8 kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 3 V/m, perf. criteria A
	- EFT (Burst)	EN 61000-4-4, ±0.5 kV, perf. criteria A
		Ext. input component: Nippon chemi-con KY 330 µF
	- Conducted RF Disturbances	EN 61000-4-6, 3 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 3 A/m, perf. criteria A

### General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +90°C
	- Case Temperature	+100°C max.
	- Storage Temperature	-55°C to +125°C
Power Derating	- High Temperature	5 %/K above 80°C
Over Temperature Protection Switch Off	- Protection Mode	160°C typ. (Automatic recovery)
	- Measurement Point	Internal IC temperature
Cooling System		Natural convection (20 LFM)
Switching Frequency		280 - 380 kHz (PWM) 330 kHz typ. (PWM)
Insulation System		Non-isolated

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.


Reliability	- Calculated MTBF	2'000'000 h (MIL-HDBK-217F, ground benign)
Washing Process		Baking after washing: 100°C for 30 min
Housing Material		Non-conductive Plastic (UL94 V-0 rated)
Pin Material		Nickel-Iron (Alloy 42)
Pin Foundation Plating		Nickel (1.5 µm min.) Copper (1 - 1.5 µm)
Pin Surface Plating		Tin (3 - 5 µm), matte
Soldering Profile		Wave Soldering 260°C / 10 s max.
Connection Type		THD (Through-Hole Device)
Weight		1.95 g
Environmental Compliance	- Reach - RoHS	<a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a> <a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a>

### Supporting Documents

Overview Link (for additional Documents)

[www.tracopower.com/overview/tsr0-5](http://www.tracopower.com/overview/tsr0-5)

### Outline Dimensions

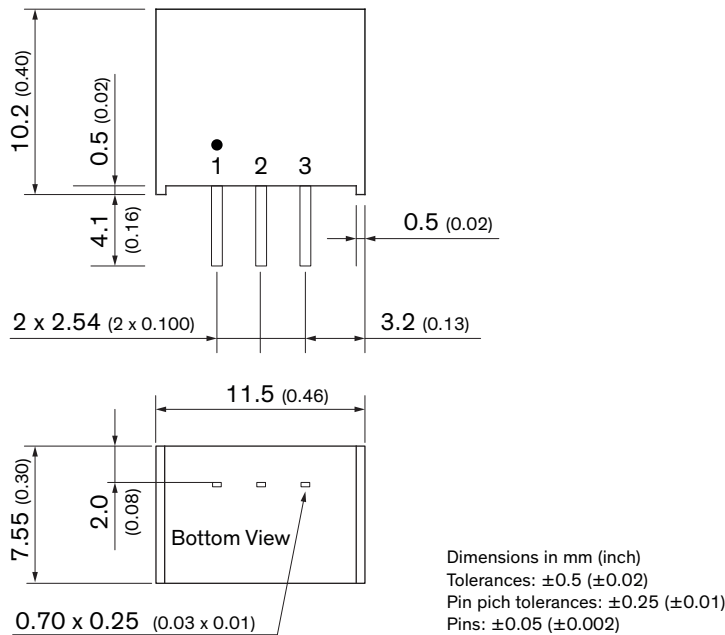

Pinout	
Pin	Function
1	+Vin
2	GND
3	+Vout